

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 0 483 507 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**05.03.1997 Bulletin 1997/10**

(51) Int Cl.<sup>6</sup>: **H01J 61/30, H01J 61/82**

(21) Application number: **91116276.6**

(22) Date of filing: **24.09.1991**

(54) **Low wattage metal halide capsule shape**

Kapselform für Niederleistungsmetallhalogenidlampe

Forme de capsule pour lampe à halogénure métallique à basse puissance

(84) Designated Contracting States:  
**BE DE FR GB IT NL**

• **Desmarais, Betina**  
**Philadelphia, PA 10146 (US)**

(30) Priority: **26.09.1990 US 588405**

(74) Representative: **Lemke, Jörg-Michael, Dipl.-Ing.**  
**Schmiedstrasse 1,**  
**Hausen**  
**86447 Aindling (DE)**

(43) Date of publication of application:  
**06.05.1992 Bulletin 1992/19**

(73) Proprietor: **GTE PRODUCTS CORPORATION**  
**Wilmington Delaware 19801 (US)**

(56) References cited:  
**EP-A- 0 173 347** **DE-A- 3 519 627**  
**GB-A- 2 169 440** **US-A- 4 594 529**

(72) Inventors:  
• **Rothwell, Harold W.**  
**Georgetown, MA 01833 (US)**

**EP 0 483 507 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description**

## 1. Technical Field

The invention relates to electric lamps and particularly to arc discharge electric lamps. More particularly the invention is concerned with the geometry of miniature arc discharge lamp capsules.

## 2. Background Art

Effort is being made to improve automobile headlamps by making headlamps with small cross sections to reduce wind resistance and thereby enhance vehicle mileage. By generating light more efficiently, electrical demands may also be reduced, again enhancing mileage. By increasing lamp durability, vehicle maintenance, and warranty service costs are also reduced. A reduced light source size may also enhance optical accuracy in forming a projected beam. Light quality may then be improved, enhancing vision, without increasing glare or stress to oncoming drivers. All of these advantages may be achieved with a low wattage arc discharge headlamp. Low wattage arc discharge lamps, however, are not sufficiently well developed to be quickly adapted to vehicle use. Further development of arc discharge lamps is needed to make a practical vehicle lamp. In particular, there is a need for an arc lamp envelope shape for direct current operation, minimal warmup time, and horizontal operation to produce about 70 lumens per watt at about 30 or 35 Watts.

Different electrode structures have been investigated in search of a proper design for direct current operation. Merely adjusting electrode shapes has not produced the features needed in a practical vehicle lamp. The shape of the capsule must also be adjusted, particularly in the region adjacent the cathode, the negative electrode. The cathode end of the arc produces a larger portion of the light, and is therefore placed at or near the focal point of a reflector. Variations in the arc dynamics, particularly those adjacent the cathode, then have a substantial affect on the beam. Proper placement of the cathode, and its interaction with the envelope are therefore recognized as important to overall beam quality. Placement of the anode, and the interaction with the adjacent lamp wall is less critical for photometric performance, but still essential for proper heat transfer.

Examples of the prior arc discharge lamp art are shown in U.S. patents 3,259,777; 4,161,672; 4,170,746; 4,396,857; 4,594,529 and 4,779,026.

U.S. patent 3,259,777 issued July 5, 1966 to Elmer Fridrich for Metal Halide Vapor Discharge Lamp with Near Molten Tip Electrodes shows tubular shaped arc discharge lamps. Figures 2a, 3a, 4 and 5 show small tubular lamps.

U.S. patent 4,161,672 issued on July 17, 1979 to Daniel Cap et al. for High Pressure Metal Vapor Discharge Lamps of Improved Efficacy discusses the shapes and electrode penetrations of lamps of less than 250 watts. In particular, Cap discloses a 30 watt ellipsoidal lamp with an internal volume of 0.066 cm<sup>3</sup> having a diameter of 3.5 millimeters, and a length of 4.5 millimeters. Cap is concerned with nearly spheroidal to elongated spheroids in combination with electrodes inserted from 4.55 to 18.75 percent of the long diameter.

U.S. patent 4,170,746 issued on Oct. 9, 1979 to John Davenport for High Frequency Operation of Miniature Metal Vapor Discharge Lamps discusses the operation of spherical lamps with 3.2, 4.0, 5.0, 6.0, and 7.0 millimeter internal diameters operated at different alternating current frequencies.

U.S. patent 4,396,857 issued on August 2, 1983 to George Danko for Arc Tube Construction shows a miniature discharge tube having a volume from 0.1 to 0.15 cm<sup>3</sup>. Danko claims the use of cylindrical solid neck portions adjacent the bulbous central volume. The cylindrical neck portions help assure a surface of revolution around the longitudinal axis of the lamp.

U.S. patent 4,594,529 issued on June 10, 1986 to Bertus de Vrijer for Metal Halide Discharge Lamp discloses a miniature tubular arc discharge lamp. de Vrijer is concerned with the tubular dimensions of a lamp for use as a headlamp.

U.S. patent 4,779,026 issued on October 18, 1988 to Jurgen Heider for Rapid Start High Pressure Discharge Lamp and Method of Its Operation shows a miniature arc discharge lamp with a tubular body, and slightly pinched transitions between the seals and bulb region. Heider discusses lamps with volumes less than 0.03 cm<sup>3</sup>.

DE-A-3 519 627 discloses a generally parabolically shaped high-pressure discharge lamp for use in a headlamp of a motor vehicle.

Disclosure of the Invention

The invention is defined in claim 1.

A low wattage, direct current, horizontally operated, metal halide capsule may be improved by forming the anode region to enhance convective currents, and forming the cathode region to be exposed to the convective currents. In a preferred embodiment, a low wattage, direct current, metal halide capsule may be formed as a generally cylindrical lamp capsule with a light transmissive material having an external wall defining a small enclosed volume. The anode

end and cathode end are asymmetrically formed to encourage differing thermal gradients, and thereby enhance convective flow. The preferred anode end has a conical form to enhance convective flow, while the preferred cathode end has a hemispherical form to expose its surface to convective flows. The enhanced convective flow is felt to counteract cataphoresis, and help sustain adequate dopant concentration in the arc. A cathode electrode is positioned axially in a cathode seal end of the lamp capsule, having a first contact end, an intermediate seal portion sealed to the capsule wall, and a second exposed internal end extending in the enclosed volume. A similar anode electrode is positioned axially in an anode seal end of the lamp capsule, having a first contact end, an intermediate seal portion sealed to the capsule wall, and a second exposed end extending in the enclosed volume. A lamp fill is also positioned in the enclosed volume, excitable to light emission when electricity is applied to the first contact end of the anode and the first contact end of the cathode. The regions behind each electrode are particularly important for the design of a direct current metal halide discharge lamp. Each electrode end of the enclosed volume is shaped to optimize overall performance.

#### Brief Description of the Drawings

FIG. 1 shows in cross section a preferred embodiment of a low wattage metal halide capsule shape with a tubular midsection.

FIG. 2 shows in cross section an alternative preferred embodiment of a low wattage metal halide capsule shape with a spheroidal section midsection.

FIG. 3 shows in cross section an alternative preferred embodiment of a low wattage metal halide capsule shape with an ellipsoidal section midsection.

#### Best Mode for Carrying Out the Invention

At the anode, the primary consideration in an arc discharge lamp design is heat dissipation. In the preferred lamp capsule embodiment, the lamp capsule is operated horizontally, and the capsule wall adjacent the anode is approximately concentric and conical with an angle of about 45 degrees to the anode. A slightly conical inner geometry was found to increase the amount of quartz near the anode root and thereby improved heat conduction from the anode. At the same time the conical form is felt to reduce the heat content in the adjacent lamp fill, thereby contributing to a convective flow that spreads across the envelope top. For direct current operation the fairly sharp angle between the conical section and the coaxially positioned anode root can be advantageous in contrast to an alternating current discharge where the sharp corner regions may stagnate gas flow. A highly acute angle between the anode and the capsule wall may trap chemical dose components and stagnate the fill material flow. A highly obtuse angle between the anode and the capsule wall may not transfer sufficient heat to the capsule wall. The preferred conical anode end of the enclosed volume is therefore felt to enhance the heat driven convective flow in a horizontally operated lamp. The enhanced flow extends through the enclosed volume to the cathode where condensed materials are more quickly swept into the convective flow.

At the cathode, the primary considerations in arc discharge lamp design are to conserve heat and to control gas convection behind the electrode. Heat loss through the capsule reduces the energy for light production. Poor gas convection allows additives to condense on the capsule or electrode root, thereby reducing their concentration in the arc. The preferred construction uses a thinned wall opposite the cathode to reduce heat conduction to the cathode seal end. The preferred surface is smooth, and otherwise exposed to convective gas flow. In one embodiment, the cathode seal end is indented to thin the amount of quartz and reduce heat conduction from the cathode root to the cathode end seal. The conserved heat helps locally heat the fill gas to enhance a vertical flow around the cathode. In addition, the indentation may help form a smooth rounded region near the cathode root. The smooth internal envelope surface improves gas convection across the metal halides or similar condensates that form on the envelope wall adjacent the cathode root. The improved convection stemming from the anode end shape then sweeps around the cathode to help vaporize the condensed materials more efficiently. A hemispherical cathode end has been found to provide the desirable smooth, exposed surface. Other surfaces approximating a hemisphere may be used.

The internal surfaces adjacent the anode and cathode roots are important since direct current cataphoretic pumping of the metal halide dominates both gas convection and cold spot temperature in controlling condensate location. Cataphoretic pumping action occurs on the cathode, the negative electrode. For a direct current light source, cataphoretic pumping is always in one direction and particular care must be taken to avoid small envelope geometries, such as sharp angles, that can trap the metal halide condensate, and starve the arc.

The shape of the midsection of the capsule is considered less critical. The midsection may be cylindrical, being initially formed from a quartz tube. The midsection may also have the form of a symmetric, and diametric section of an ellipsoid or spheroid provided the axial curvature of the section is small. The preferred tubular shape for the midsection is then well approximated by the slight barrel shape. High curvatures necessarily lead to a large intersection angle between the midsection and the anode root, thereby producing symmetric heat structures at each end thereby pro-

ducing equal thermal gradients that frustrate convective flow. In combination the conical anode end, tubular or barrel midsection and hemispherical cathode end give a tear shaped enclosed volume.

FIG. 1 shows in cross section a preferred embodiment of a low wattage, horizontally operated metal halide capsule shape with a tubular midsection. The low wattage metal halide lamp 10 is assembled from a lamp capsule 12, a lamp fill 30, an anode 40, and a cathode 66 to be operated generally horizontally along an axis 68.

The lamp capsule 12 may be formed from a light transmissive material such as quartz or glass. In the preferred embodiment the lamp capsule 12 has an anode seal end 14, leading by an anode neck 16 with an anode neck thickness 20. The anode seal end 14 necessarily acts as a heat sink which draws energy from the lamp. The anode neck 16 is then designed to enhance heat flow to the anode seal end 14 from an anode root 46. Adjacent the anode neck 16 is a midsection 22 with an internal surface 24 defining an enclosed volume 26. Midsection 22 has the general form of an object of rotation, with a wall thickness 28. The midsection 22 extends to a cathode neck 36, leading to a cathode seal end 38.

In the preferred embodiment, the enclosed volume 26 has an overall length to widest width ratio of about 2.7. The enclosed volume 26 for the low wattage discharge capsule has a volume of less than  $0.1 \text{ cm}^3$ , and preferably less than about  $0.05 \text{ cm}^3$ . In one example, a capsule 12 with an enclosed volume of  $0.020 \text{ cm}^3$  was found to work quite well. The capsule 12 should have a wall thickness 28, as measured along the midsection 22 and as the shortest distance between the outer surface and internal surface 24 sufficient to conduct enough heat from the wall area to the anode seal end 14, and cathode seal end 36, such that in combination with radiation, and convection from the lamp surface, the capsule 12 temperature is maintained somewhat below the softening point of the capsule material. The preferred wall thickness is not scaled linearly with respect to larger lamps, but is somewhat thicker for the small volume. The object is for the capsule 12 to reach the highest possible temperature that the capsule material may endure for a sustained period with minimal material degradation. The coldest spot along the internal volume should be hot enough to adequately vaporize the salt condensates, which is generally about  $750^\circ\text{C}$ . Similarly, the hottest point should not exceed the softening point of the envelope material given the pressure of operation. A lamp may otherwise be operated within these temperature limits. A higher temperature in the limits is usually more efficient, but is destructive to the lamp and shortens the lamp's life. A lower temperature in the limits is less efficient in producing lumens per watt, but the lamp lasts longer. A lower temperature also contributes to inefficient salt condensate coverage which may prolong warmup time at constant wattage. For a capsule 12 with a volume of  $0.02 \text{ cm}^3$ , the preferred wall thickness 28 is about 1.5 millimeters.

The capsule 12 geometry is important in maximizing lamp efficiency and lamp warmup times. The preferred capsule 12 has an internal surface 24 with an approximately conical anode end 18, an approximately tubular midsection 22, and an approximately hemispherical cathode end 32. The conical anode end 18 has a preferred half angle of about 45 degrees from the lamp axis axis 68 to one side, or equivalently, providing about a 90 degree angle from side to side. The cone base 50 of the conical anode end 18 is approximately transverse to the lamp axis 68 and coplanar with the anode tip 48. The relevant features of the conical anode end 18 are thought to be that the anode tip 48 is positioned relatively far from the internal surface 24, while the inner surface 24 is near the length of the anode root 46 for heat conduction from the anode root 46.

The midsection 22 of the preferred internal surface 24 has a cylindrical form. A coaxial section of a spheroid, or ellipsoid may also be used. Fig. 2 shows a capsule with a spheroidal midsection 70, and Fig. 3 shows a capsule with an ellipsoidal midsection 72. The axial length 52 of the the midsection 22 determines the anode tip 48 to cathode tip 56 separation, and is preferably about 4.0 millimeters or about one and a half times the diameter D of 2.6 millimeters. The relevant features are thought to be that the midsection 22 be a surface of rotation with respect to the lamp axis 68, and have little or no curvature in the axial direction. Tubular, or slightly barrel shaped internal surfaces are then preferred.

The preferred hemispherical cathode end 32 has nearly the diameter of the midsection 22, and is positioned so the cathode tip 56 is the center of a sphere tangent on one half with the hemispherical end 32. The diametric base 58 of the hemispherical end 32 is approximately transverse to the lamp axis 68 and coplanar with the cathode tip 56. The relevant features of the hemispherical end 32 are thought to be that the internal surface 24 adjacent the cathode root 60 is smooth, and the cathode tip 56 be positioned maximally far from the internal surface 24. The cathode root 60 near the inner surface 24 remains as hot as possible. By being hot, smooth and open the cathode end structure encourages vertical gas convection to vaporize condensates on the cathode end 32.

The preferred capsule 12 has essentially tubular geometry with a minor internal diameter D 54 of about 2.6 millimeters, a major internal diameter or length L of about 7.1 millimeters giving an aspect ratio L/D of 2.72. By way of example the capsule 12 is shown as a cylinder with asymmetrical regions behind the anode and cathode. The important features are felt to be the relatively large standoff between the anode tip 48, and the adjacent internal surface 24, in combination with the relatively extended internal anode tip 48 to cathode tip 56 length 52, as is provided in a cylindrical or prolate spheroid capsule. The asymmetrical regions behind the anode tip 48 and cathode tip 56 enhance differing thermal gradients, and thereby encourage horizontal convective flow.

The capsule 12 supports in the anode seal end 14 an anode 40. The preferred anode 40 has an anode contact 42, an intermediate anode seal 44, and an exposed anode tip 48. The preferred anode 40 is positioned coaxially to pass from the exterior of the capsule 12 through the anode seal end 14 to the enclosed volume 26. The anode contact 42 is then exposed on the capsule exterior to receive electricity. The anode seal 44 is sealed to the anode seal end 14, and the anode tip 48 is positioned in the enclosed volume 26. In the preferred embodiment the anode tip 48 extends axially into the enclosed volume 26 a distance X approximately the same distance as the anode 40 tip is from the internal surface 24. Since the adjacent conical anode end 18 is approximately at 45 degrees to the anode, the transverse distance from the anode tip 48 to the inside surface is about the diameter D divided by two times the square root of two. The anode tip 48 extension aspect,  $X/D$  is then about 0.5. In the preferred embodiment, the anode tip 48 is then positioned as a center point in a coaxial conical end 18 of the enclosed volume 26. The inside surface 24 intersects the anode root 46 to leave an acute angle in the enclosed volume 26. By way of example an anode 40 is shown as an exterior rod coupled to a sealing foil, which in turn is coupled to a straight rod with a rounded tip that extends into the enclosed volume 26. Other electrode sealing, and electrode tip structures are known and may be adapted for use in the present design.

The capsule 12 supports in a cathode seal end 38 the cathode 66. The cathode 58 has a cathode tip 56, a cathode root 60, a cathode seal 62, and an exposed cathode contact 64. In the preferred embodiment the cathode tip 56 end is positioned axially into the enclosed capsule volume a distance Y approximately the same distance as the cathode tip 56 is from the inside wall of the capsule. Since the enclosed volume 26 is approximately cylindrical, the transverse distance from the cathode 58 tip to the inside surface is about one half the diameter,  $D/2$ . The cathode 58 extension aspect,  $Y/D$  is then about 0.5. In the preferred embodiment, the cathode 58 tip is then positioned as a center point in a sphere whose surface on one side is approximately tangent to the hemispherical cathode end 32 of the enclosed volume 26. More conventionally, the surface of the enclosed volume 26 at the cathode end is approximately hemispherical about the cathode tip. The inside surface of the enclosed volume 26 then intersects the cathode root 60 approximately perpendicularly. The cathode 58 is positioned to pass from the enclosed volume 26 through the cathode seal end 38 to the exterior to receive electricity. By way of example a cathode 58 is shown as an exterior rod coupled to a sealing foil, which in turn is coupled to a straight rod with a rounded tip that extends into the enclosed volume 26. Other cathode sealing, and cathode tip structures are known and may be adapted for use in the present design.

Lamp fills 30 for arc discharge lamps are known to have a carrier gas such as neon, argon, krypton, or xenon, and a variety of additives such as mercury, scandium, iodine, and others. Numerous lamp fills are thought to be appropriate for the present lamp envelope structure. The preferred lamp fill 28 is a mercury, sodium scandium iodide ( $\text{NaScI}_4$ ) fill in eight atmospheres of xenon. Other suitable compositions may be used.

Alternative embodiments of the tear shaped arc discharge lamp are shown in FIG. 2 and FIG 3. FIG. 2 shows in cross section an alternative preferred embodiment of a low wattage metal halide capsule shape with a spheroidal section midsection. FIG. 3 shows in cross section an alternative preferred embodiment of a low wattage metal halide capsule shape with an ellipsoidal section midsection.

The preferred method of manufacturing the tear shaped arc discharge lamp is to first, simultaneously press seal and pressure mold the cathode end. Press sealing, seals the cathode in place, while pressure molding expands the enclosed volume 26 around the cathode root to an approximately hemispherical end. Accurate placement of the cathode, and formation of the adjacent cathode end may then be achieved in one operation. The pressure molding can also form the middle section in an expanded cylindrical, spherical, ellipsoidal or similar section. The partially formed capsule is then purged of contaminants. Flushing the capsule volume with nitrogen is suggested. The metal halides, or other additives and fill gas are then positioned in the capsule volume. The gas fill is cryothermally condensed in the enclosed volume. An anode is positioned in the remaining open end of the capsule and vacuum sealed in place. Vacuum sealing substantially preserves the hemispherical cathode end, and cylindrical middle section, while collapsing the anode end of the capsule to seal with the anode. Vacuum sealing yields a conical shaped anode end adjacent the anode root.

Capsule warmup depends on interrelated factors. Warm up factors include capsule mass, input electrical power, fill gas composition, fill gas pressure, chemical dose composition, and chemical dose amount. Several volumes and wall thicknesses were evaluated to seek the minimum warmup time for a nearly constant input current. In general capsule wall thicknesses from approximately 0.4 to 1.5 millimeters, and capsule volumes from 0.02 to 0.1 cubic centimeters were examined. A minimum warmup was arbitrarily chosen to be the time required to reach 80% of full operating light output. The same ballast was used for all warmup time measurements for different envelope shapes.

The preferred lumen output was determined by the minimum number of lumens required for a legal headlamp. While some metal halide lamps may achieve more than 70 lumens per watt, the preferred lamp was not designed to maximize light generation. In an automotive headlamp, excess light may cause glare for oncoming vehicles, so only the required number of lumens should be produced. The arc discharge may be designed to be wall stabilized. Wall stabilization influences the brightness of the discharge. Wall stabilization is generally preferred for a vehicle lamp, since discharge movement is less pronounced. The light then does not flutter with arc motion as in electrode stabilization.

Unfortunately, wall stabilized arcs cause high thermal loads on the inner walls. High thermal loads may soften, and reshape the envelope wall.

Initially, the lamps with the best warmup times were found to operate with the top portion of the lamp envelope wall at temperatures above 1100 degrees centigrade. These temperatures soften the envelope wall. The capsule shape was changed to satisfy horizontal operation and still maintain maximum wall temperatures below the degradation point of the capsule, about 1000 degrees centigrade for quartz. The primary designs are tabulated below showing the critical parameters.

TABLE 1.

TUBE SHAPE	ellipse	tear	ellipse	tear
TUBE SIZE	2X4	2X4	2X5	2X5
VOLUME (cc)	0.096	0.039	0.076	0.020
ZALL (mm)	0.61	0.89	1.0	1.5
MINOR ID (mm)	4.8	3.0	4.8	2.0
MAJOR ID (mm)	9.0	8.0	7.8	7.5
WATTAGE	30	30	30	30
LUMENS PER WATT	69	71	45	64
RUN UP 50% (sec)	18	7	22	32
RUN UP 80% (sec)	28	12	55	48
WALL TEMP (C)	1175	1100	1000	900

The term "ellipse" refers to an elliptical or football shaped capsule, and "tear" refers to a tear drop or tubular capsule with one end rounded and the opposite end more pointed. The major difference in the several lamp shapes is wall thickness. By increasing wall thickness, thermal conduction is increased, thereby reducing the maximum wall temperature, but also reducing total lumens and increasing warmup time. By substantially decreasing the enclosed volume, the lumen output could be improved without increasing the wall temperature.

When the area of the internal wall covered by the metal halide condensate is increased, the condensate vaporizes more rapidly, thereby maintaining a higher concentration of the additives in the arc. The optimum design is felt to be described by a 2 x 5 tubular geometry with the anode end being formed to enhance convective flow, and the cathode end being formed to present condensate to the convective flow. The overall shape appearing "tear" shaped. The conical and hemispherical surfaces then help sustain the additive dose in the arc to maintain lamp performance.

In a working example some of the dimensions were approximately as follows: The capsule was about 32 millimeters long. The anode seal end was a vacuum seal 5.08 millimeters wide and about 11.5 millimeters long. The anode necked down area was about 1.5 millimeters long, and had an indentation of about 1.0 millimeters. The tubular midsection was about 3.98 millimeters long, with an outside diameter of 5.2 millimeters. The enclosed volume was 7.1 millimeters long and 2.6 millimeters in internal diameter. The cathode necked down region was similar to the first, being about 1.0 millimeters long and having an indentation of about 1.0 millimeters. The cathode sealed end was about 9.5 millimeters long and 6.1 millimeters across.

Sealed in the first seal end was a cathode from a first input wire. The first input wire had a diameter of about 0.51 millimeters. The input wire entered the anode seal end and coupled to a first foil. The first foil had a length of 5.0 millimeters and width of 1.5 millimeters. The first foil was then coupled to a cathode. The cathode electrode extended into the enclosed volume to be exposed by about 1.5 millimeters in the enclosed volume. The opposite electrode, the anode was similarly exposed by about 1.5 millimeters in the enclosed volume. The anode entered the second seal area to couple with a second foil about 1.5 millimeters in width and 5.0 millimeters in length. Coupled to the opposite end of the second foil was a second lead wire with a diameter of about 0.51 millimeters extended. The second lead wire emerged from the second seal to be exposed for electrical connection. The enclosed volume included a fill lamp fill including mercury, sodium, scandium, iodine and about 8 atmospheres of xenon. The disclosed operating conditions, dimensions, configurations and embodiments are as examples only, and other suitable configurations and relations may be used to implement the invention.

While there have been shown and described what are at present considered to be the preferred embodiments of the invention, it will be apparent to those skilled in the art that various changes and modifications may be made herein without departing from the scope of the invention defined by the appended claims.

## Claims

1. A low wattage, direct current, horizontally operated metal halide capsule (12) with an internal cavity comprising:
  - a) a generally cylindrical capsule formed from a light transmissive material, with an internal wall (24) defining an enclosed volume (26) less than  $0.1 \text{ cm}^3$ , the wall (24) having a cathode end (32) open to convective flows in the enclosed volume (26), an intermediate band (22), and an anode end (18), asymmetric with respect to the cathode end (32) shape to produce a differing thermal gradient with respect to the cathode end (32) and thereby enhance convective flow in the enclosed volume (26),
  - b) an anode electrode (40), positioned in an anode end (18) of the capsule (12), having a first contact end (42), an intermediate seal portion (44) coupled to the capsule (12), and a second exposed internal end (46) extending through the anode end (18) of the enclosed volume (26) into the enclosed volume,
  - c) a cathode electrode (66), positioned in the cathode end (32) of the capsule (12), having a first contact end (64), an intermediate seal portion (62) coupled to the capsule (12), and a second exposed internal end (60) extending through the cathode end (32) of the enclosed volume (26) into the enclosed volume, and
  - d) a lamp fill (30) positioned in the enclosed volume (26), excitable to light emission on application of electricity to the first contact end (42) of the anode (40) and the first contact end (64) of the cathode (66).
2. Capsule according to claim 1, wherein the anode electrode (40) and the cathode electrode (66) are positioned axially in said anode end (18) and said cathode end (32), respectively, said intermediate seal portions (44, 62) are sealed to the capsule wall (24), and said second exposed internal ends (46, 60) of said anode (40) and cathode (66) extending generally coaxially through the respective ends (18, 32) of the enclosed volume (26) into the enclosed volume.
3. Capsule according to claim 2, wherein the cathode end (32) of the enclosed volume (26) is approximately hemispherical.
4. Capsule according to claim 3, wherein an end structure of the cathode electrode (66) is approximately coplanar with a plane transverse to the lamp axis (68) to define a diametric plane (58) of the hemispherical end of the enclosed volume (26).
5. Capsule according to claim 2, wherein the anode end (18) of the enclosed volume (26) is approximately conical.
6. Capsule according to claim 5, wherein the tip (48) of the anode electrode (40) is approximately coplanar with a plane (48) defining a base of the conical end of the enclosed volume (26).
7. Capsule according to claim 2, wherein the intermediate band (22) has a wall thickness of less than 2.0 millimeters.
8. Capsule according to claim 2, wherein the intermediate band (22) has a tubular form with an approximately constant internal diameter (54).
9. Capsule according to claim 2, wherein the intermediate band (22) has a spherical section form with an approximately constant curvature (Fig. 2).
10. Capsule according to claim 2, wherein the intermediate band (22) has an elliptical section form (Fig. 3).
11. Capsule according to claim 2 or claims 1, 2, 3 and 5, wherein said capsule (12) has a tear shaped internal cavity, the enclosed volume (26) is less than  $0.040 \text{ cm}^3$ , and the anode end (18) has a lower side to produce heat and thereby enhances or stimulates, respectively, convective flow in the enclosed volume (26).
12. Capsule according to claims 1, 2, 3 and 5, wherein said capsule (12) has a wall thickness of less than 2.0 millimeters and defines an enclosed volume (26) of less than  $0.020 \text{ cm}^3$  with a transverse internal diameter (54) of about 2.0 millimeters and an axial internal diameter (52) of about 7.5 millimeters.

## Patentansprüche

1. Metallhalogenidkapsel (12) niedriger Leistung, die horizontal angeordnet mit Gleichstrom betrieben wird, einen

internen Hohlraum besitzt und aufweist:

- a) eine aus lichtdurchlässigem Material gebildete, im wesentlichen zylindrische Kapsel mit einer inneren Wand (24), die ein eingeschlossenes Volumen (26) von weniger als  $0,1 \text{ cm}^3$  definiert, wobei die Wand (24) ein Kathodenende (32), das für konvektive Strömungen in dem eingeschlossenen Volumen (26) offen ist, ein zwischengeschaltetes Band (22) und ein Anodenende (18) aufweist, das bezüglich der Form des Kathodenendes (32) asymmetrisch ist, um einen abweichenden Wärmegradienten bezüglich des Kathodenendes (32) zu erzeugen und dadurch die konvektive Strömung im eingeschlossenen Volumen (26) zu verstärken,
- b) eine in einem Anodenende (18) der Kapsel (12) positionierte Anodenelektrode (40), die ein erstes Anschlußende (42), einen an die Kapsel (12) gekoppelten intermediären Dichtungsabschnitt (44) und ein zweites exponiertes inneres Ende (46) aufweist, das sich durch das Anodenende (18) des eingeschlossenen Volumens (26) in das eingeschlossene Volumen hineinerstreckt,
- c) eine im Kathodenende (32) der Kapsel (12) angeordnete Kathodenelektrode (66), die ein erstes Anschlußende (64), einen an die Kapsel (12) angekoppelten intermediären Dichtungsabschnitt (62) und ein zweites exponiertes inneres Ende (60) besitzt, das sich durch das Kathodenende (32) des eingeschlossenen Volumens (26) in das eingeschlossene Volumen hineinerstreckt, und
- d) eine in dem eingeschlossenen Volumen (26) angeordnete Lampenfüllung (30), die zur Aussendung von Licht anregbar ist, sobald an das erste Anschlußende (42) der Anode (40) und das erste Anschlußende (64) der Kathode (66) Elektrizität angelegt wird.

2. Kapsel nach Anspruch 1, bei welcher die Anodenelektrode (40) und die Kathodenelektrode (66) jeweils axial im Anodenende (18) und Kathodenende (32) positioniert sind, die intermediären Dichtungsabschnitte (44, 62) an der Kapselwand (24) angedichtet sind, und die zweiten exponierten inneren Enden (46, 60) der Anode (40) und der Kathode (66) sich im allgemeinen coaxial durch die jeweiligen Enden (18, 32) des eingeschlossenen Volumens (26) in das eingeschlossene Volumen hineinerstrecken.
3. Kapsel nach Anspruch 2, bei welcher das Kathodenende (32) des eingeschlossenen Volumens (26) näherungsweise halbkugelig ist.
4. Kapsel nach Anspruch 2, bei welcher ein Endaufbau der Kathodenelektrode (66) näherungsweise koplanar mit einer quer zur Lampenachse (68) angeordneten Ebene verläuft, um eine diametrische Ebene (58) des halbkugeligen Endes des eingeschlossenen Volumens (26) zu definieren.
5. Kapsel nach Anspruch 2, bei welcher das Anodenende (18) des eingeschlossenen Volumens (26) näherungsweise konisch ist.
6. Kapsel nach Anspruch 5, bei welcher die Spitze (48) der Anodenelektrode (40) näherungsweise koplanar mit einer Ebene (48) angeordnet ist, welche eine Basis des konischen Endes des eingeschlossenen Volumens (26) definiert.
7. Kapsel nach Anspruch 2, bei welcher das intermediäre Band (22) eine Wanddicke von weniger als 2,0 Millimetern aufweist.
8. Kapsel nach Anspruch 2, bei welcher das intermediäre Band (22) Rohrform mit einem näherungsweise konstanten inneren Durchmesser (54) aufweist.
9. Kapsel nach Anspruch 2, bei welcher das intermediäre Band (22) eine kugelige Abschnittsform mit einer näherungsweise konstanten Biegung (Fig. 2) aufweist.
10. Kapsel nach Anspruch 2, bei welcher das intermediäre Band (22) eine elliptische Abschnittsform (Fig. 3) aufweist.
11. Kapsel nach Anspruch 2 oder den Ansprüchen 1, 2, 3 und 5, bei welcher die Kapsel (12) eine tränenförmige innere Höhlung aufweist, das eingeschlossene Volumen (26) kleiner als  $0,040 \text{ cm}^3$  ist und das Anodenende (18) eine untere Seite zur Erzeugung von Wärme aufweist und dadurch Konvektionen im eingeschlossenen Volumen (26) verstärkt bzw. stimuliert.
12. Kapsel nach Anspruch 1, 2, 3 und 5, bei welcher die Kapsel (12) eine Wanddicke von weniger als 2,0 Millimetern besitzt und ein eingeschlossenes Volumen (26) von weniger als  $0,020 \text{ cm}^3$  definiert, und einen inneren Durchmesser (54) in Querrichtung von etwa 2,0 Millimetern und einen inneren Durchmesser (52) in Axialrichtung von



etwa 7,5 Millimetern aufweist.

## Revendications

1. Capsule (12) à halogénures métalliques de faible puissance, à courant continu, fonctionnant horizontalement et présentant une cavité interne, comprenant :
  - a) une capsule de forme générale cylindrique formée dans un matériau transmettant la lumière, avec une paroi interne (24) définissant un volume fermé (26) inférieur à  $0,1 \text{ cm}^3$ , la paroi (24) ayant une extrémité (32) de cathode ouverte des flux de convection dans le volume fermé (26), une bande intermédiaire (22) et une extrémité (18) d'anode, asymétrique par rapport à la forme de l'extrémité (32) de cathode pour produire un gradient thermique différent par rapport à l'extrémité (32) de cathode et, ainsi, améliorer le flux par convection dans le volume fermé (26),
  - b) une électrode formant anode (40), positionnée dans l'extrémité (18) d'anode de la capsule (12), ayant une première extrémité (42) de contact, une partie intermédiaire (44) de scellement couplée à la capsule (12), et une deuxième extrémité interne exposée (46) s'étendant à travers l'extrémité (18) d'anode du volume fermé (26) à l'intérieur du volume fermé,
  - c) une électrode formant cathode (66), positionnée dans l'extrémité (32) de cathode de la capsule (12), ayant une première extrémité (64) de contact, une partie intermédiaire de scellement (62) couplée à la capsule (12), et une deuxième extrémité interne exposée (60) s'étendant à travers de l'extrémité (32) de cathode du volume fermé (26) à l'intérieur du volume fermé, et
  - d) un remplissage de lampe (30) disposé dans le volume fermé (26), excitable pour émettre une lumière lors de l'application d'électricité à la première extrémité (42) de contact de l'anode (40) et à la première extrémité (64) de contact de la cathode (66).
2. Capsule selon la revendication 1, dans laquelle l'électrode formant l'anode (40) et l'électrode formant la cathode (66) sont disposées axialement dans la dite extrémité (18) d'anode et la dite extrémité (32) de cathode respectivement, les dites parties intermédiaires de scellement (44, 62) sont scellées à la paroi (24) de la capsule, et les dites deuxième extrémités interne exposées (46, 60) des dites anode (40) et cathode (66) s'étendent coaxialement de façon générale à travers les extrémités respectives (18, 32) du volume fermé (26) à l'intérieur du volume fermé.
3. Capsule selon la revendication 2, dans laquelle l'extrémité (32) de cathode du volume fermé (26) est approximativement hémisphérique.
4. Capsule selon la revendication 3, dans laquelle la structure d'extrémité de l'électrode formant cathode (66) est approximativement coplanaire à un plan transversal à l'axe (68) de la lampe pour définir un plan diamétral (58) de l'extrémité hémisphérique du volume fermé (26).
5. Capsule selon la revendication 2, dans laquelle l'extrémité (18) d'anode du volume fermé (26) est approximativement conique.
6. Capsule selon la revendication 5, dans laquelle la tête (48) de l'électrode formant anode (40) est approximativement coplanaire à un plan (48) déterminant une base d'une extrémité conique du volume fermé (26).
7. Capsule selon la revendication 2, dans laquelle l'épaisseur de la paroi de la bande intermédiaire (22) est inférieure à 2,0 millimètres.
8. Capsule selon la revendication 2, dans laquelle la bande intermédiaire (22) a une forme tubulaire avec un diamètre interne (54) approximativement constant.
9. Capsule selon la revendication 2, dans laquelle la bande intermédiaire (22) a une section de forme sphérique avec une courbure approximativement constante (Fig. 2).
10. Capsule selon la revendication 2, dans laquelle la bande intermédiaire (22) a une section de forme elliptique (Fig. 3).
11. Capsule selon la revendication 2 ou les revendications 1, 2, 3 et 5, dans laquelle la dite capsule (12) a une cavité

interne en forme de larme, le volume fermé (26) est inférieur à  $0,040 \text{ cm}^3$ , et l'extrémité (18) d'anode a une paroi inférieure pour produire de la chaleur et, ainsi, améliorer ou stimuler, respectivement, un flux de convection dans le volume fermé (26).

- 5    **12.** Capsule selon les revendications 1, 2, 3 et 5, dans laquelle l'épaisseur de la paroi de la dite capsule (12) est inférieure à 2,0 millimètres, la capsule définit un volume fermé (26) inférieur à  $0,020 \text{ cm}^3$ , avec un diamètre transversal interne (54) de 2,0 millimètres environ et un diamètre axial interne (52) de 7,5 millimètres environ.

10

15

20

25

30

35

40

45

50

55

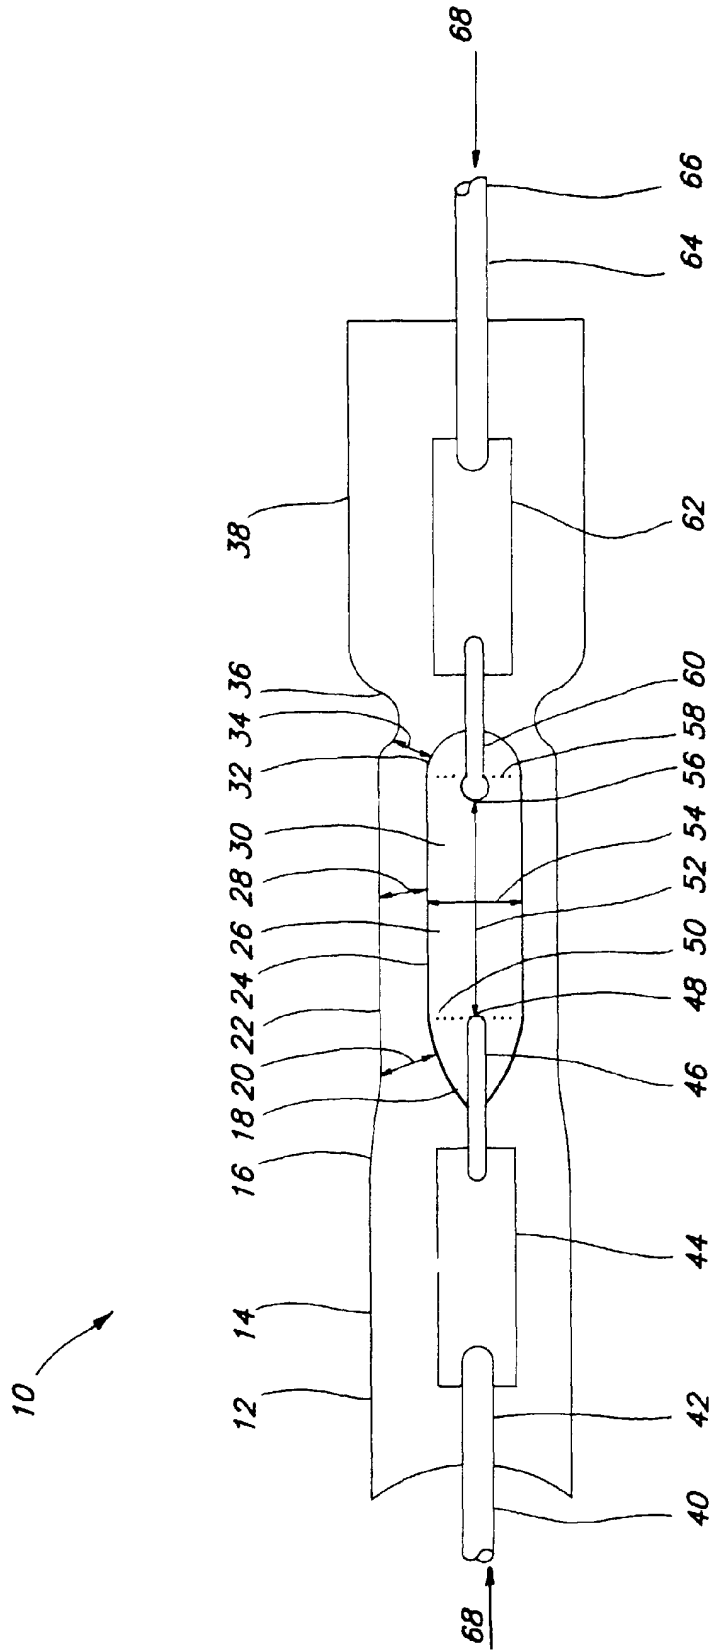
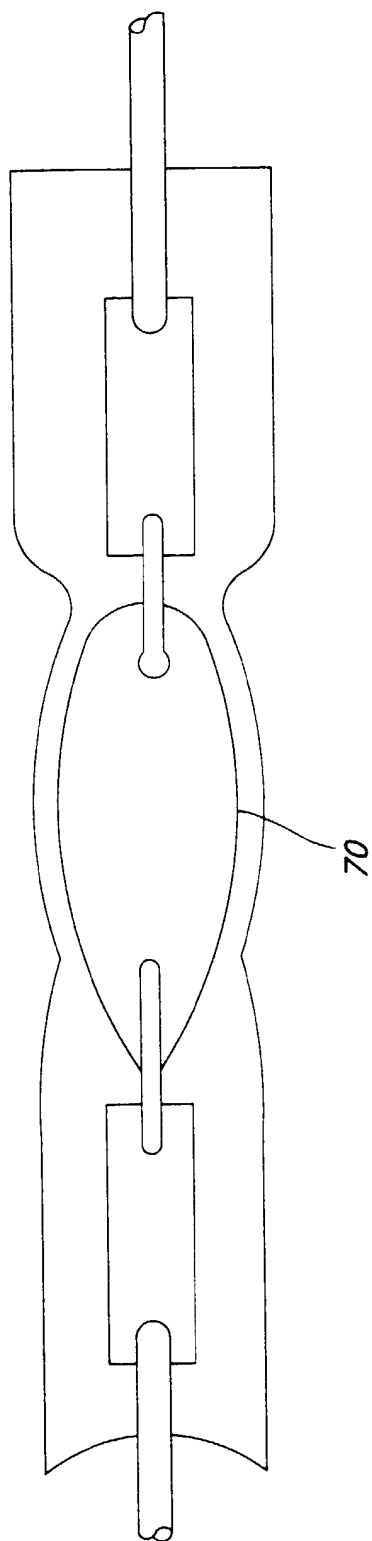
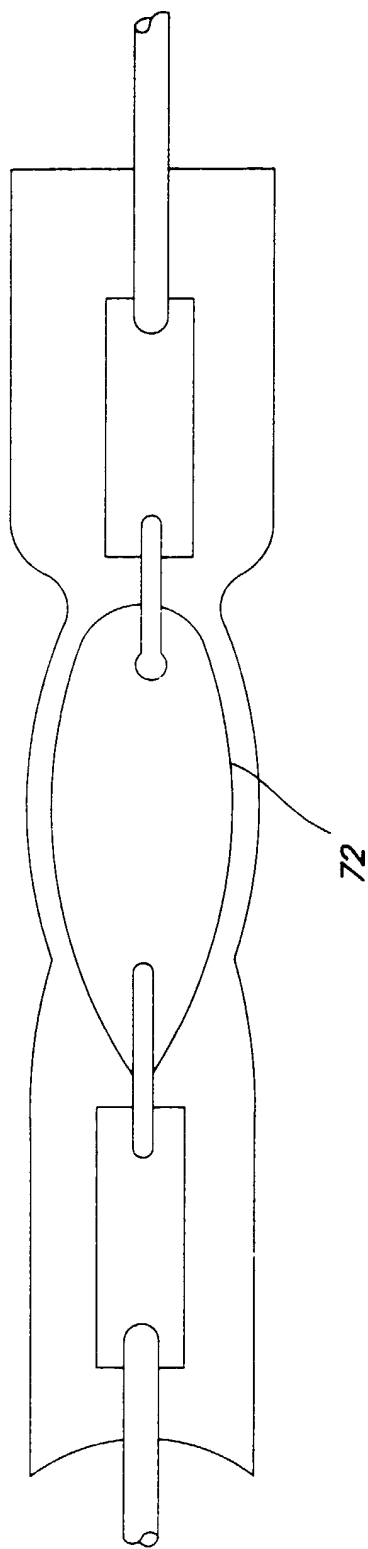


FIG. 1



**FIG. 2**



**FIG. 3**